

State Maps and Prescriptive Packages


April 2000

The State Maps and Prescriptive Packages contain supporting materials that are needed when using the Envelope and Mechanical Compliance Guides. Insulation and other building envelope requirements and some mechanical system requirements vary by climate. The State Maps divide the United States into 33 different climate zones at a county level. Zones are numbered from 1 through 19 (consistent with the IECC and MEC*check* climate zones) and have a, b, and c designations to reflect climate differences that affect cooling; e.g., cooling degree days and solar radiation. The climate maps are unchanged from Version 1.

To determine the climate zone to use with your building, locate the map for your state and identify the zone number from the legend or county list.

To determine insulation and other building envelope requirements, find the prescriptive package number corresponding to your climate zone. The *Envelope Compliance Guide* employs a package approach that requires all components in your design to meet or exceed the prescribed efficiency levels contained in the prescriptive package. If you find the prescriptive packages too constraining, consider using the COM*check-EZ* software, which allows tradeoffs among building envelope components.

MISSISSIPPI

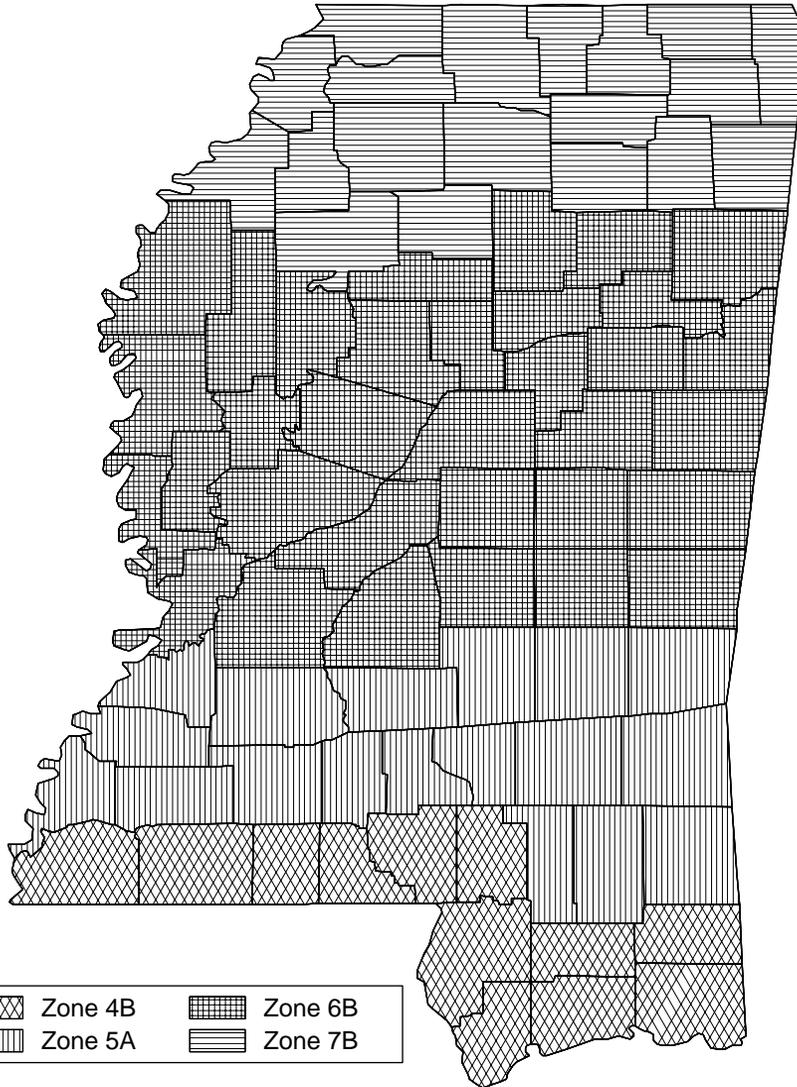

Zone	County	Zone	County
5A	Adams	6B	Leflore
7B	Alcorn	5A	Lincoln
4B	Amite	6B	Lowndes
6B	Attala	6B	Madison
7B	Benton	4B	Marion
6B	Bolivar	7B	Marshall
6B	Calhoun	6B	Monroe
6B	Carroll	6B	Montgomery
6B	Chickasaw	6B	Neshoba
6B	Choctaw	6B	Newton
5A	Claiborne	6B	Noxubee
5A	Clarke	6B	Oktibbeha
6B	Clay	7B	Panola
7B	Coahoma	4B	Pearl River
5A	Copiah	5A	Perry
5A	Covington	4B	Pike
7B	De Soto	7B	Pontotoc
5A	Forrest	7B	Prentiss
5A	Franklin	7B	Quitman
4B	George	6B	Rankin
5A	Greene	6B	Scott
6B	Grenada	6B	Sharkey
4B	Hancock	5A	Simpson
4B	Harrison	5A	Smith
6B	Hinds	4B	Stone
6B	Holmes	6B	Sunflower
6B	Humphreys	7B	Tallahatchie
6B	Issaquena	7B	Tate
7B	Itawamba	7B	Tippah
4B	Jackson	7B	Tishomingo
5A	Jasper	7B	Tunica
5A	Jefferson	7B	Union
5A	Jefferson Davis	4B	Walthall
5A	Jones	6B	Warren
6B	Kemper	6B	Washington
7B	Lafayette	5A	Wayne
4B	Lamar	6B	Webster
6B	Lauderdale	4B	Wilkinson
5A	Lawrence	6B	Winston
6B	Leake	7B	Yalobusha
7B	Lee	6B	Yazoo

COMcheck-EZ™ Prescriptive Packages

Climate Zone 4b

Envelope Component	Low Fenestration Area (0-10% Window-Wall Ratio)			Medium Fenestration Area (10%-25% Window-Wall Ratio)			High Fenestration Area (25%-40% Window-Wall Ratio)			Very High Fenestration Area (40%-50% Window-Wall Ratio)		
	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing
Walls (a,b)												
Framed <i>Minimum Cavity R-Value (c)</i>	NA	11	11	NA	11	11	NA	11	11	NA	13	11
Any Spacing <i>Minimum Continuous R-Value (d)</i>	NA	0	0	NA	0	0	NA	0	0	NA	3	0
CMU, 8 in. or greater <i>Minimum Cavity R-Value</i>	NA	0	0	NA	0	0	NA	0	0	NA	0	0
with Integral Insulation(e) <i>Minimum Continuous R-Value</i>	0	0	0	0	0	0	0	0	0	0	0	0
All Other <i>Minimum Cavity R-Value</i>	NA	0	0	NA	11	11	NA	11	11	NA	11	11
Masonry Walls(f) <i>Minimum Continuous R-Value</i>	0	0	0	5	0	0	5	0	0	5	0	0
Windows												
<i>Maximum Solar Heat Gain Coefficient</i>	No Projection	^{§.25} Projection	^{§.5} Projection	No Projection	^{§.25} Projection	^{§.5} Projection	No Projection	^{§.25} Projection	^{§.5} Projection	No Projection	^{§.25} Projection	^{§.5} Projection
<i>Maximum U-Factor</i>	Any	Any	Any	0.6	0.7	Any	0.4	0.5	0.6	0.4	0.5	0.6
	Any	Any	Any	Any	Any	Any	0.7	0.7	0.7	0.7	0.7	0.7
Skylight (Limit 3% of Roof Area)												
<i>Maximum U-Factor</i>	1			1			1			1		
Roof	Continuous Insulation or Roof Cavity Insulation			Continuous Insulation or Roof Cavity Insulation			Continuous Insulation or Roof Cavity Insulation			Continuous Insulation or Roof Cavity Insulation		
All-Wood Joist/Truss <i>Minimum R-Value</i>	16		19	16		19	16		19	16		19
Nonwood Joist/Truss <i>Minimum R-Value</i>	17		25	17		25	17		25	17		25
Concrete Slab or Deck <i>Minimum R-Value</i>	16		NA	16		NA	16		NA	16		NA
Metal Purlin with Thermal Break <i>Minimum R-Value</i>	17		25	17		25	17		25	17		25
Metal Purlin without Thermal Break <i>Minimum R-Value</i>	17		X	17		X	17		X	17		30
Floor	Continuous Insulation or Cavity Insulation			Continuous Insulation or Cavity Insulation			Continuous Insulation or Cavity Insulation			Continuous Insulation or Cavity Insulation		
All-Wood Joist/Truss <i>Minimum R-Value</i>	4		11	4		11	4		11	4		11
Nonwood Joist/Truss <i>Minimum R-Value</i>	4		11	4		11	4		11	4		11
Concrete Slab or Deck <i>Minimum R-Value</i>	4		NA	4		NA	4		NA	4		NA
Slab Edge or Basement Walls	Insulation											
<i>Minimum R-Value</i>	0											

Notes:

- (a) For walls next to unconditioned spaces, use the Low Fenestration Area wall requirements.
- (b) Where values are shown for both cavity and continuous insulation, both requirements must be met.
- (c) Cavity insulation is insulation between framing members or furring strips and does not refer to integral insulation in CMUs.
- (d) Continuous insulation is insulation that is continuous across structural members, and its effectiveness is undiminished by compression or bridging.
- (e) Integral insulation in concrete masonry units may be perlite, vermiculite, or other insulating material. Minimum R-values are in addition to insulation in CMU voids.

- (f) Use of the Other Masonry Walls category is restricted to walls weighing 35 lb/ft2 or more; lightweight masonry veneers and unfilled CMUs <8 in. in thickness do not qualify.

- "NA" indicates the category is not applicable.
- A minimum R-value of zero indicates no insulation is required.
- "Any" indicates any available product will comply.
- "X" indicates no complying option exists in the prescriptive packages.

COMcheck-EZ™ Prescriptive Packages

Climate Zone 5a

Envelope Component	Low Fenestration Area (0-10% Window-Wall Ratio)			Medium Fenestration Area (10%-25% Window-Wall Ratio)			High Fenestration Area (25%-40% Window-Wall Ratio)			Very High Fenestration Area (40%-50% Window-Wall Ratio)		
	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing
Walls (a)												
Framed Any Spacing <i>Minimum R-Value</i>	NA	11	11	NA	11	11	NA	11	11	NA	11	11
CMU, 8 in. or greater with Integral Insulation(b) <i>Minimum R-Value</i>	0	0	0	0	0	0	0	0	0	0	0	0
All Other Masonry Walls(c) <i>Minimum R-Value</i>	0	0	0	5	11	11	5	11	11	5	11	11
Windows												
<i>Maximum Solar Heat Gain Coefficient</i>	No Projection	^{§.25} Projection	^{§.5} Projection	No Projection	^{§.25} Projection	^{§.5} Projection	No Projection	^{§.25} Projection	^{§.5} Projection	No Projection	^{§.25} Projection	^{§.5} Projection
<i>Maximum U-Factor</i>	Any	Any	Any	0.6	0.7	Any	0.5	0.6	0.7	0.4	0.5	0.7
	Any	Any	Any	Any	Any	Any	0.7	0.7	0.7	0.7	0.7	0.7
Skylight (Limit 3% of Roof Area)												
<i>Maximum U-Factor</i>	1			1			1			1		
Roof												
All-Wood Joist/Truss <i>Minimum R-Value</i>	Continuous Insulation	or	Roof Cavity Insulation	Continuous Insulation	or	Roof Cavity Insulation	Continuous Insulation	or	Roof Cavity Insulation	Continuous Insulation	or	Roof Cavity Insulation
Nonwood Joist/Truss <i>Minimum R-Value</i>	14		19	16		19	16		19	16		19
Concrete Slab or Deck <i>Minimum R-Value</i>	15		19	17		25	17		25	17		25
Metal Purlin with Thermal Break <i>Minimum R-Value</i>	14		NA	16		NA	16		NA	16		NA
Metal Purlin without Thermal Break <i>Minimum R-Value</i>	15		25	17		25	17		25	17		25
	15		X	17		X	17		X	17		30
Floor												
All-Wood Joist/Truss <i>Minimum R-Value</i>	Continuous Insulation	or	Cavity Insulation	Continuous Insulation	or	Cavity Insulation	Continuous Insulation	or	Cavity Insulation	Continuous Insulation	or	Cavity Insulation
Nonwood Joist/Truss <i>Minimum R-Value</i>	5		11	5		11	5		11	5		11
Concrete Slab or Deck <i>Minimum R-Value</i>	6		11	6		11	6		11	6		11
	5		NA	5		NA	5		NA	5		NA
Slab Edge or Basement Walls												
<i>Minimum R-Value</i>	Insulation			Insulation			Insulation			Insulation		
	0			0			0			0		

Notes:

- (a) For walls next to unconditioned spaces, use the Low Fenestration Area wall requirements.
- (b) Integral insulation in concrete masonry units may be perlite, vermiculite, or other insulating material.
- (c) Use of the Other Masonry Walls category is restricted to walls weighing 35 lb/ft2 or more; lightweight masonry veneers and unfilled CMUs <8 in. in thickness do not qualify.

- "NA" indicates the category is not applicable.
- A minimum R-value of zero indicates no insulation is required.
- "Any" indicates any available product will comply.
- "X" indicates no complying option exists in the prescriptive packages.

COMcheck-EZ™ Prescriptive Packages

Climate Zone 6b

Envelope Component	Low Fenestration Area (0-10% Window-Wall Ratio)			Medium Fenestration Area (10%-25% Window-Wall Ratio)			High Fenestration Area (25%-40% Window-Wall Ratio)			Very High Fenestration Area (40%-50% Window-Wall Ratio)		
	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing
Walls (a)												
Framed Any Spacing <i>Minimum R-Value</i>	NA	11	11	NA	11	11	NA	11	11	NA	11	11
CMU, 8 in. or greater with Integral Insulation(b) <i>Minimum R-Value</i>	0	0	0	0	0	0	0	0	0	0	0	0
All Other Masonry Walls(c) <i>Minimum R-Value</i>	0	0	0	5	11	11	5	11	11	5	11	11
Windows												
<i>Maximum Solar Heat Gain Coefficient</i>	No Projection	^{3.25} Projection	^{3.5} Projection	No Projection	^{3.25} Projection	^{3.5} Projection	No Projection	^{3.25} Projection	^{3.5} Projection	No Projection	^{3.25} Projection	^{3.5} Projection
<i>Maximum U-Factor</i>	Any	Any	Any	0.6	0.7	Any	0.5	0.6	0.7	0.4	0.5	0.7
	Any	Any	Any	Any	Any	Any	0.7	0.7	0.7	0.7	0.7	0.7
Skylight (Limit 3% of Roof Area)												
<i>Maximum U-Factor</i>	1			1			1			1		
Roof	Continuous Insulation or Roof Cavity Insulation			Continuous Insulation or Roof Cavity Insulation			Continuous Insulation or Roof Cavity Insulation			Continuous Insulation or Roof Cavity Insulation		
All-Wood Joist/Truss <i>Minimum R-Value</i>	16		19	16		19	19		25	19		25
Nonwood Joist/Truss <i>Minimum R-Value</i>	17		25	17		25	20		25	20		25
Concrete Slab or Deck <i>Minimum R-Value</i>	16		NA	16		NA	19		NA	19		NA
Metal Purlin with Thermal Break <i>Minimum R-Value</i>	17		25	17		25	20		30	20		30
Metal Purlin without Thermal Break <i>Minimum R-Value</i>	17		X	17		X	20		X	20		38
Floor	Continuous Insulation or Cavity Insulation			Continuous Insulation or Cavity Insulation			Continuous Insulation or Cavity Insulation			Continuous Insulation or Cavity Insulation		
All-Wood Joist/Truss <i>Minimum R-Value</i>	6		11	6		11	6		11	6		11
Nonwood Joist/Truss <i>Minimum R-Value</i>	6		11	6		11	6		11	6		11
Concrete Slab or Deck <i>Minimum R-Value</i>	6		NA	6		NA	6		NA	6		NA
Slab Edge or Basement Walls	Insulation											
<i>Minimum R-Value</i>	0											

Notes:

- (a) For walls next to unconditioned spaces, use the Low Fenestration Area wall requirements.
- (b) Integral insulation in concrete masonry units may be perlite, vermiculite, or other insulating material.
- (c) Use of the Other Masonry Walls category is restricted to walls weighing 35 lb/ft² or more; lightweight masonry veneers and unfilled CMUs <8 in. in thickness do not qualify.

- "NA" indicates the category is not applicable.
- A minimum R-value of zero indicates no insulation is required.
- "Any" indicates any available product will comply.
- "X" indicates no complying option exists in the prescriptive packages.

COMcheck-EZ™ Prescriptive Packages

Climate Zone 7b

Envelope Component	Low Fenestration Area (0-10% Window-Wall Ratio)			Medium Fenestration Area (10%-25% Window-Wall Ratio)			High Fenestration Area (25%-40% Window-Wall Ratio)			Very High Fenestration Area (40%-50% Window-Wall Ratio)		
	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing	No Framing	Metal Framing	Wood Framing
Walls (a,b)												
Framed <i>Minimum Cavity R-Value (c)</i>	NA	11	11	NA	11	11	NA	13	13	NA	13	13
Any Spacing <i>Minimum Continuous R-Value (d)</i>	NA	0	0	NA	0	0	NA	0	0	NA	3	0
CMU, 8 in. or greater <i>Minimum Cavity R-Value</i>	NA	0	0	NA	11	11	NA	11	11	NA	11	11
with Integral Insulation(e) <i>Minimum Continuous R-Value</i>	0	0	0	5	0	0	5	0	0	5	0	0
All Other <i>Minimum Cavity R-Value</i>	NA	11	11	NA	11	11	NA	13	11	NA	13	11
Masonry Walls(f) <i>Minimum Continuous R-Value</i>	5	0	0	5	0	0	6	0	0	6	0	0
Windows												
<i>Maximum Solar Heat Gain Coefficient</i>	No Projection	^{§.25} Projection	^{§.5} Projection	No Projection	^{§.25} Projection	^{§.5} Projection	No Projection	^{§.25} Projection	^{§.5} Projection	No Projection	^{§.25} Projection	^{§.5} Projection
<i>Maximum U-Factor</i>	Any	Any	Any	0.5	0.6	0.7	0.4	0.5	0.6	0.3	0.4	0.5
	Any	Any	Any	0.7	0.7	0.7	0.7(g)	0.7(g)	0.7(g)	0.7	0.7	0.7
Skylight (Limit 3% of Roof Area)												
<i>Maximum U-Factor</i>	0.8			0.8			0.8			0.8		
Roof												
All-Wood Joist/Truss <i>Minimum R-Value</i>	Continuous Insulation	or	Roof Cavity Insulation	Continuous Insulation	or	Roof Cavity Insulation	Continuous Insulation	or	Roof Cavity Insulation	Continuous Insulation	or	Roof Cavity Insulation
Nonwood Joist/Truss <i>Minimum R-Value</i>	14		19	19		25	19		25	19		25
Concrete Slab or Deck <i>Minimum R-Value</i>	15		19	20		25	20		25	20		25
Metal Purlin with Thermal Break <i>Minimum R-Value</i>	14		NA	19		NA	19		NA	19		NA
Metal Purlin without Thermal Break <i>Minimum R-Value</i>	15		25	20		30	20		30	20		30
	15		X	20		X	20		X	20		38
Floor												
All-Wood Joist/Truss <i>Minimum R-Value</i>	Continuous Insulation	or	Cavity Insulation	Continuous Insulation	or	Cavity Insulation	Continuous Insulation	or	Cavity Insulation	Continuous Insulation	or	Cavity Insulation
Nonwood Joist/Truss <i>Minimum R-Value</i>	7		11	7		11	7		11	7		11
Concrete Slab or Deck <i>Minimum R-Value</i>	8		11	8		11	8		11	8		11
	8		NA	8		NA	8		NA	8		NA
Slab Edge or Basement Walls												
<i>Minimum R-Value</i>	Insulation			Insulation			Insulation			Insulation		
	0			0			0			0		

Notes:

- (a) For walls next to unconditioned spaces, use the Low Fenestration Area wall requirements.
- (b) Where values are shown for both cavity and continuous insulation, both requirements must be met.
- (c) Cavity insulation is insulation between framing members or furring strips and does not refer to integral insulation in CMUs.
- (d) Continuous insulation is insulation that is continuous across structural members, and its effectiveness is undiminished by compression or bridging.
- (e) Integral insulation in concrete masonry units may be perlite, vermiculite, or other insulating material. Minimum R-values are in addition to insulation in CMU voids.
- (f) Use of the Other Masonry Walls category is restricted to walls weighing 35 lb/ft² or more; lightweight masonry veneers and unfilled CMUs <8 in. in thickness do not qualify.
- (g) For buildings over 3 stories in height, the maximum U-factor shall be 0.60.
 - "NA" indicates the category is not applicable.
 - A minimum R-value of zero indicates no insulation is required.
 - "Any" indicates any available product will comply.
 - "X" indicates no complying option exists in the prescriptive packages.